


INCINERATOR



Incinerator may incinerate sump oil, sewage, sludge and plastic, paperboard and food wastes. It is an important device for the pollution prevention in various ships and offshore platforms. The reliable system consists of high quality sludge tank and fan. Wastes compactor and spark arrestor are option. The Incinerator meets the latest IMO Resolution MEPC.244(66).

Features:

- Touch screen HMI, Modbus protocol for communication, a key operating automatically
- Three heating resource available, steam, electric and thermal oil
- Optimized incinerating process, lower fuel consumption
- Food waste vacuum collection, incineration module Option
- USCG approval

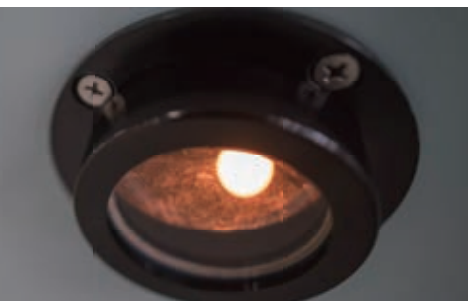

Type	Capacity (kcal/h)	kW	Sludge (kg/h)	Solid waste
HSINC-18	180,000	208	22.5	30kg/charge
HSINC-50	500,000	580	63	60kg/charge
HSINC-50A	500,000	580	63	60kg/h
HSINC-80	800,000	929	100	136kg/h
HSINC-100	1,000,000	1162	125	140kg/h
HSINC-130	1,290,000	1491	170	140kg/h

