


OILY WATER SEPARATOR



Oily Water Separator mainly comprises of gravity separating tank and absorbing filter, and treated water secured no more than 15ppm. The separator meets the latest IMO.MEPC.107(49) code. It is widely used for ships' bilge water and rigs' oily water.

Features:

- Compact design, easy maintenance and high efficiency process
- Special organic clay for emulsion absorbing
- High quality 15ppm bilge alarm unit secured reliable and accuracy discharge monitor
- Middle positioned processing pump to avoid emulsification
- USCG approval

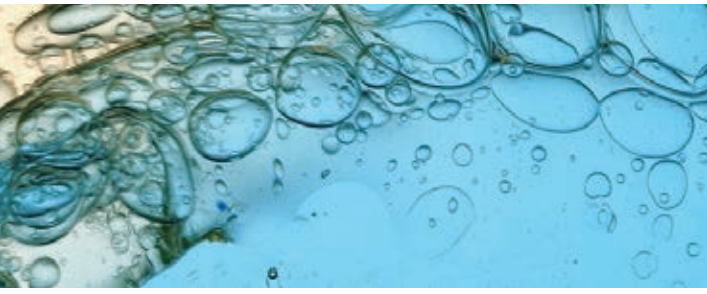

Model	Treatment capacity (m ³ /h)	L×W×H (cm)	Dry weight (kg)	Organoclay/sand (kg)
MiniBoss	0.25	81×26×100	38	—
BOSS 2.2T/107	0.5	105×76×140	260	41
BOSS 5T/107	1.1	120×95×157	430	82
BOSS 11T/107	2.5	150×108×195	770	147
BOSS 25T/107	5.6	200×111×200	1110	290
BOSS 45T/107	10.2	260×140×219	1800	630

